

DF200 Level Sensor Datasheet _Sigfox

Version



Version: V1.0

Date: 2020-8-26

Content

Disclaimer.....	1
Cautions.....	1
1 Overview.....	1
2 Features.....	1
3 Appliation.....	1
4 Specification.....	2
5 Mechanical Dimensions.....	3
6 System network diagram.....	3
7 Protocol and API interface.....	4
8 Package.....	4

Disclaimer

CNDingtek makes every effort to make this document accurate, complete and clear. However, CNDingtek reserves the right to modify hardware, software, colors, specifications, guidelines, packaging, etc. without notice. Due to photographing and printing reasons, the photos in this document may be different from the actual released products. Please use the published products as the final reference.

Cautions

- The battery is non-rechargeable. Pls do not charge it.
- If the battery is out of power, please replace it with a battery of the same specification obtained from CNDingtek
- The battery can not work when temperatures is above 85 ° C.



1 Overview

DF200 is a Level Sensor, and automatic hand sanitizer; It can automatically sense, and periodically detect the capacity of liquid. When the level is less than the threshold, the information will be immediately transmitted to the cloud server through the built-in Sigfox module. Users can observe status information remotely. Through the Sigfox method, with high real-time performance and low power consumption.

Support RCZ1, RCZ2,RCZ3,RCZ4,etc.

2 Features

- Easy to install and small in size
- Accurate and timely , real-time monitoring, alarm immediately
- Auto-sensing
- Liquid level measure
- Low power consumption.
- Multiple application environments.

3 Appliation

Widely used in Hotels, shopping malls, restaurants, schools, hospitals, public places, etc.,.



4 Specification

Specification	Dimension	121*107*261mm
	Color	White
Level Detector	Theory	Magnetic Switch
Measuring range	Range	0%,25%,50% ,75%, 100%
Capacity	Liquid capacity	1000mL
Wireless	Wireless	Sigfox
	Band	RCZ1,RCZ2,RCZ3,RCZ4 etc
Power (optional)	I :Innner battery	6V; Donot include the battery default
	II :Power supply	6VDC
Environment	Working Temperature	-20 ~ +70°C
	Storage Temperature	-40 ~ +85°C


Installation	Way	Wall-mounted
	Installation hole distance	80*94*72mm

5 Mechanical Dimensions



(Note: For reference only, actual product updates are frequent without notice)

6 System network diagram

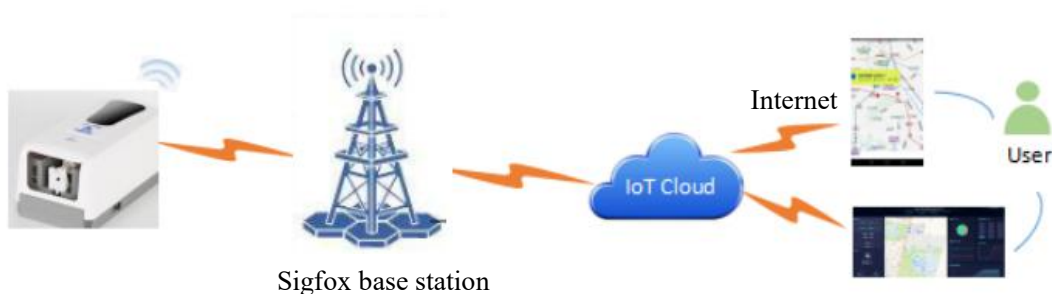

Through the built-in Sigfox wireless module, it transmits data to the base station, Then transmits the data to the Sigfox cloud server by internet and

application server. Finally, the user can monitor the status of the leve in real time according to the Web or APP, and online monitoring and management.

7 Protocol and API interface

The terminal communication protocol is confidential documents and are only available to customers who purchased the device and signed NDA (non-disclosure agreement) documents with CNDingtek and his own company. If you want to integrate with your own system by using a protocol, please contact our sales team at service@dingtek.com.

8 Package

Accessories name	Specification	Quantity	Note
Device	DF200 level sensor	1	
TTL	Serial tools	1	Serial tools (at least one per batch of equipment)
Manual		1	